


SST 500/700

Single-stage Steam Turbines

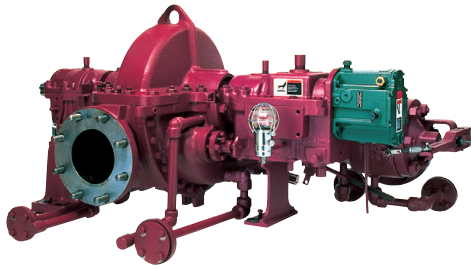

The API 611- and API 612-compliant single-stage steam turbine (SST) is a versatile, rugged steam turbine typically specified by the refining, petrochemical, food processing, steel, and other industries as an economical and reliable mechanical drive for lube oil pumps, process pumps, feed water pumps, fans, compressors, and generators.

Horizontal, Axial Split Casing

The axial split design allows the upper half of the casing to be removed for easier access to internal parts inspection and replacement. The sturdy metal-to-metal joint sealing casing design meets ASME section VIII and NEMA stress level standards compliant with API 612 requirements.

Overspeed Trip System

The SST safety valve and trip system work independently of the governor. They use a piloted venturi-type mechanical trip valve and provide positive closure to shut off steam to the turbine in the event of overspeed. The valve can be reset against full steam pressure.

Trip and Throttle Valve (optional)

The trip and throttle valve functions as a quick-closing valve (manual or automatic) that is actuated by the overspeed governor, a mechanical safety trip, or the optional electronic trip actuators. It also functions as a manually operated throttle valve for bringing the steam turbine up to speed (standard supply on SST 700LP). Choose from a Dresser-Rand mechanical trip and throttle valve, or a Dresser-Rand Gimpel™ oil-operated trip and throttle valve.

Governors


The Woodward Class A TG governor is standard equipment on all SST models as a self-contained, hydraulic powered governor for high output and accurate speed control. Alternate governing systems are supplied as necessary based on operating conditions or when specified by the client.

Rotors, Bearings, and Seals

Two rows of single-disc, Curtis forged wheels are shrunk and keyed to the shaft to prevent wheel movement relative to the shaft throughout the steam turbine speed range. Solid rotor designs are available as an option for high-speed applications.

Journal bearings are split at the horizontal center line for easy access and replacement without removing the rotor. Bearings are bronze-backed and babbitt-lined for improved operating life. Standard oil ring or optional pressure lubrication can be used as required. Anti-friction ball bearings also are available for quick start applications or where mist-oil lubrication is specified.

- 1 High-efficiency blading
- 2 Keyed and shrunk wheel on shaft
- 3 Unique, angle-type carbon-ring packing
- 4 Industrial-type babbitt-lined journal bearings
- 5 High-capacity thrust bearing for positive rotor location
- 6 Nonsparking, bolt-type overspeed trip
- 7 Speed governor
- 8 Oil rings
- 9 Trip lever
- 10 Governor valve stem
- 11 Stationary, replaceable, nonsparking labyrinth bearing-case oil seals
- 12 Oil rings
- 13 Internal oil reservoir

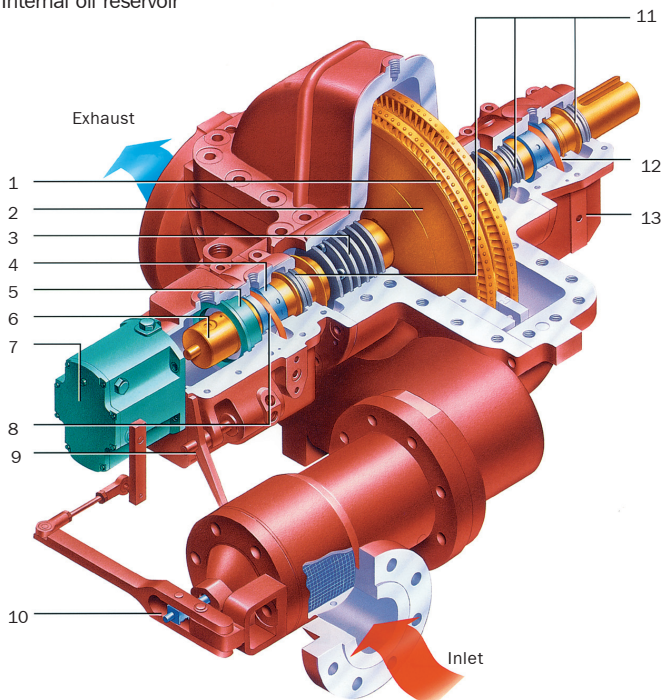

For more information on **single-stage steam turbines** contact our Worcester, MA technology center, or one of the following locations

Dresser-Rand

299 Lincoln Street
Worcester, MA 01605
Tel: 1-888-268-8726
Fax: 508-595-1788

Dresser-Rand

37 Coats St. - PO Box 592
Wellsville, NY 14895
Tel: 1-800-828-2818
Fax: 585-593-5815

Dresser-Rand

C.I. Tower, St. Georges Square
High Street
New Malden KT3 4DN
United Kingdom
Tel+44 (20) 8336 7316
Fax: +44 (20) 8949 5606

For a complete list of D-R products and services, visit us at www.dresser-rand.com or contact us at the following locations:

Dresser-Rand

Corporate Headquarters

West8 Tower Suite 1000
10205 Westheimer Road
Houston, TX 77042 USA
Tel: (Int'l +1) 713-354-6100
Fax: (Int'l +1) 713-354-6110
email: info@dresser-rand.com

112, Avenue Kleber
75784 – Paris Cedex 16
Tel: (Int'l +33) 156 26 71 71
Fax: (Int'l +33) 156 26 71 72
email: info@dresser-rand.com

Regional Headquarters

The Americas

Dresser-Rand
West8 Tower Suite 1000
10205 Westheimer Road
Houston, TX 77042 USA
Tel: (Int'l +1) 713-354-6100
Fax: (Int'l +1) 713-354-6110

EMEA

(Europe, Middle East, Eurasia, Africa)
Dresser-Rand S.A.
31 Boulevard Winston Churchill
Cedex 7013
Le Havre 76080 France
Tel: (Int'l +33) 2-35-25-5225
Fax: (Int'l +33) 2-35-25-5366 / 5367

Asia-Pacific

Dresser-Rand Asia Pacific Sdn Bhd
Unit 8-1, 8th Floor
Bangunan Malaysian Re
17 Lorong Dungun
Damansara Heights
50490 Kuala Lumpur, Malaysia
Tel: (Int'l +60) 3-2093-6633
Fax: (Int'l +60) 3-2093-2622

Steam sealing glands feature an angle-type carbon ring design with the packing case integral to the turbine casing. Inconel™ springs hold the rings in place. Optional labyrinth and mechanical seals also are available.

Features:



- Meets API 611
- Direct drive, oil relay (Woodward TG Series) constant speed governors
- Overspeed mechanical trip and safety shut-off
- Curtis forged wheel
- Carbon ring sealing glands
- Built-in, removable steam strainer
- Center line support

Optional Features:

- NEMA Class D and variable speed governors
- Manual or automatic hand valve controls
- Inpro™ oil seals
- Labyrinth or mechanical steam seals
- Copper-free construction for corrosive atmospheres
- Trip and throttle valves (standard on SST 700LP)
- Solenoid trips for remote shutdowns
- API 612 construction

Dimensions - in (mm)

	500	500H	
L	4 inlet / 6 inlet 58 (1475) / 75 (1905)	4 inlet / 6 inlet 63 (1600) / 75 (1905)	
W	4 inlet / 6 inlet 41 (1040) / 44 (1120)	4 inlet / 6 inlet 41 (1040) / 44 (1120)	
H	30 (770)	30 (770)	
CLH	14 (356)	14 (356)	
C	16 (410)	16 (410)	
O	3 (76)	3 (76)	
	700	700H	700LP
L	4 inlet / 6 inlet 62 (5280) / 70 (1780)	4 inlet / 6 inlet 61 (1550) / 73 (1860)	4 inlet / 6 inlet / 8 inlet 60 (1530) / 67 (1710) / 73 (1860)
W	4 inlet / 6 inlet 46 (1170) / 49 (1250)	4 inlet / 6 inlet 46 (1170) / 49 (1250)	4 inlet / 6 inlet / 8 inlet 52 (1320) / 50 (1270) / 52 (1320)
H	38 (910)	41 (1050)	53 (1350)
CLH	19 (483)	19 (483)	19 (483)
C	21 (540)	22 (560)	21 (540)
O	3 (76)	3 (76)	3.5 (89)

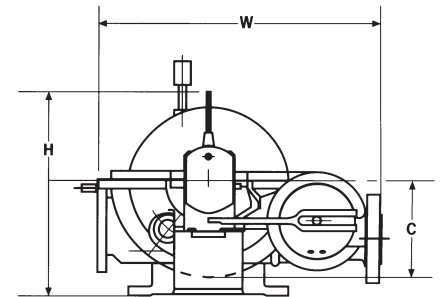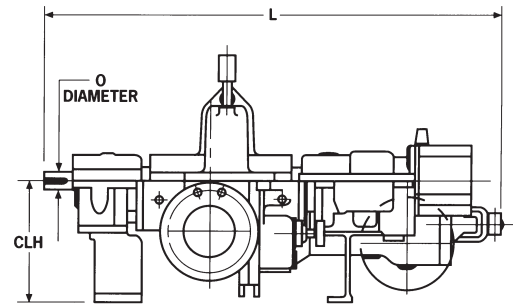

Specifications

Model SST	Power HP (kW)	Inlet Pressure psig ₁ (bar)	Inlet Temp °F (°C)	Exhaust psig ₂ (bar)	RPM	Inlet Diameter In (mm)	Exhaust Diameter In (mm)
500	3500 (2600)	700 (48)	825 (440)	150 (10)	8000	6 (150)	8 (200)
500H	3500 (2600)	700 (48)	825 (440)	300 (20)	12000	6 (150)	8 (200)
700	3500 (2600)	700 (48)	825 (440)	75 (5)	6150	6 (150)	12 (300)
700H	3500 (2600)	700 (48)	825 (440)	150 (10)	5350	6 (150)	12 (300)
700LP	3500 (2600)	400 (28)	775 (413)	75 (5)	6150	8 (200)	16 (400)

©2007 Dresser-Rand. This document comprises a general overview of the products described herein. It is solely for informational purposes, does not represent a warranty or guarantee of the information contained herein and is not to be construed as an offer to sell or a solicitation to buy. Contact Dresser-Rand for detailed design and engineering information suitable to your specific applications. Dresser-Rand reserves the right to modify its products and related product information at any time without prior notice. Form 2153

