


Gimpel™ Valves Assembly Dimensions

Oil Operated Trip Throttle Valve OOTTV (Inverted, Globe Body) 3" to 24" CL150 to 900

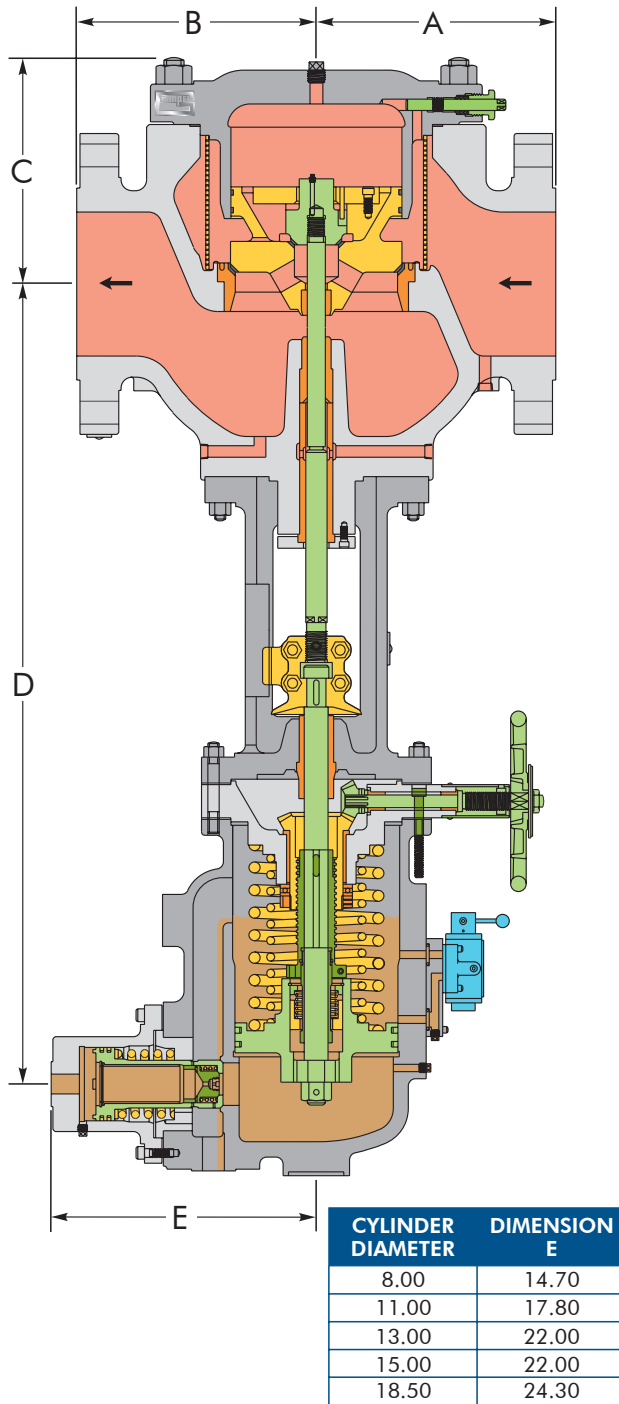

SIZE NPS	PRESSURE CLASS	EST. WT. (LBS)	DIMENSIONS (INCHES)			
			A	B	C	D
3	150*		7.25	7.25	7.62	
	300*		7.50	7.50		
	600*		7.75	7.75		
	900*		8.00	8.00		
4	150	800-1200	8.50	8.50	7.75	44.00
	300		8.50	8.50		
	600		8.75	8.75		
	900		9.00	9.00		
5	150*		10.62	10.62	9.44	
	300*		11.25	11.25		
	600*		12.25	12.25		
	900*		12.25	12.25		
6	150	1200-1700	11.25	11.25	10.44	55.00
	300	1500-2000	12.00	12.00		
	600		13.00	13.00		
	900	2500-2800	15.00	15.00		
8	150	1800-2300	12.62	12.62	13.31	57.00
	300		13.12	13.12		
	600	2300-3000	14.00	14.00		
	900		15.12	15.12		
10	150	2000-3300	14.50	14.50	13.75	72.00
	300		15.12	15.12		
	600	3300-4200	16.00	16.00		
	900		17.00	17.00		
12	150	3500-4400	16.00	16.00	16.25	74.00
	300	4400-5300	16.62	16.62		
	600		17.50	17.50		
	900	18.25	18.25	19.56		
14	150	5000-5800	17.88	17.88	19.69	73.00
	300		18.62	18.62		
	600	5800-6700	19.50	19.50		
	900		20.12	20.12		
16	150	5200-6000	19.00	19.00	24.75	77.00
	300	6000-7000	22.00	22.00		
	600		23.00	23.00		
	900*					
18	150*					
	300*					
	600*					
	900*					
20	150*		24.38	24.38	28.12	
	300*		25.00	25.00		
	600*		26.50	26.50		
	900*		28.00	28.00		
24	150*		27.12	27.12	30.50	
	300*		28.00	28.00		
	600*					
	900*					

NOTE:

- This drawing is for information purposes only. Do not use for construction.
- Information contained herein is subject to change without notice.
- All dimensions are in INCHES. All weights are in POUNDS.
- Dimension "D" will vary with cylinder size used. Maximums given. Gimpel must advise cylinder size needed for operation at steam conditions to be specified by customer.
- Weight ranges given are intended as a guide. Actual weights can be advised by Dresser-Rand.

*Refer to Dresser-Rand

Gimpel™ Valves Assembly Dimensions Oil Operated Trip Throttle Valve OOTTV (Inverted, Globe Body)

DRESSER-RAND

DRAWING
NUMBER

L-4934